

EtherLink 232

EtherLink 232 from iKON PRO is the ideal solution for remotely controlling RS232 serial devices over Ethernet via your LAN / WAN or even Internet.


EtherLink 232 supports baud rates up to 230.4Kbps and can operate as a Client or server utilising either TCP or UTP protocols with set-up via the network.

Features


- 10/100 auto detect interface.
- Supports auto MD/MDIX so can use a crossover or parallel cable.
- Virtual serial port support.
- Link and Data indicators.
- Use as a server or client.
- Supports four simultaneous clients in server mode.
- Easy to install.
- Backed by iKONS 3-year warranty and free lifetime technical support.

Typical Applications

Controlling remote projectors via TCP from a Synergy 2083E panel.

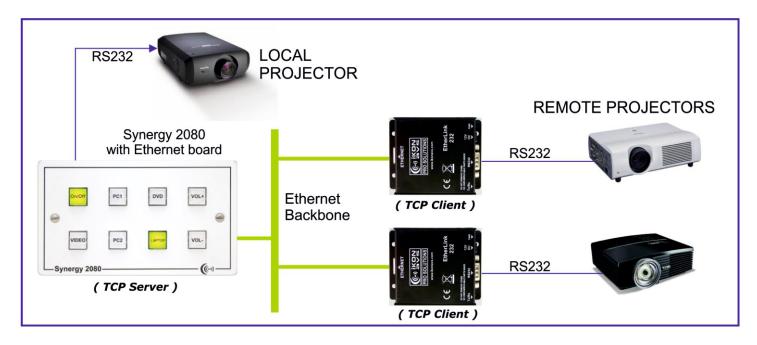

Used as a server to four remote clients from a Wall 16 panel.

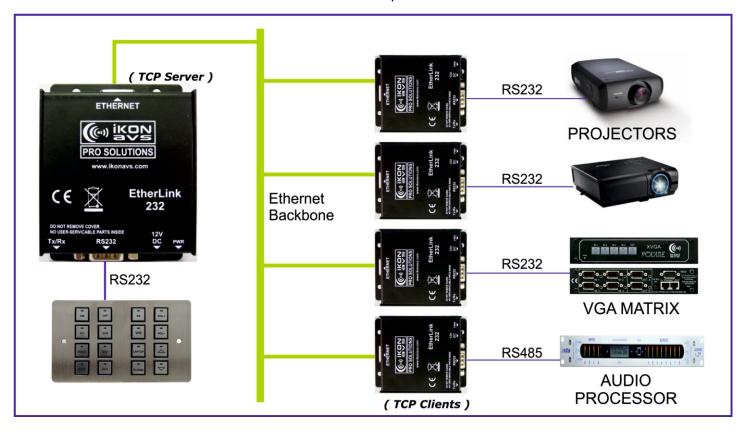

Expanding a Synergy system with a tablet.

